

# YR Series

## YardRamp

For truck or railcar-to-ground applications, choose a 36' unit including a 6' level off. Choose a 30' straight design for quick loading from dock to ground.

- Available in capacities from 16,000 to 60,000 lbs.
- Heavy-duty structural steel subframe construction for strength and longevity.
- Steel serrated grating and corrosion-resistant enamel paint.
- Solid 18" rubber tires standard; pneumatic tires optional.
- Double-action hydraulic pump.
- Beveled approach provides a smooth transition.
- All steel welded construction

### Warranty


PIONEER offers a 1-year limited warranty on all materials and workmanship.

### Guarantee


PIONEER will provide our standard warranty or match any documented competitive warranty in the industry for comparable models. There is no fine print.



*Rugged. Dependable. PIONEER.*

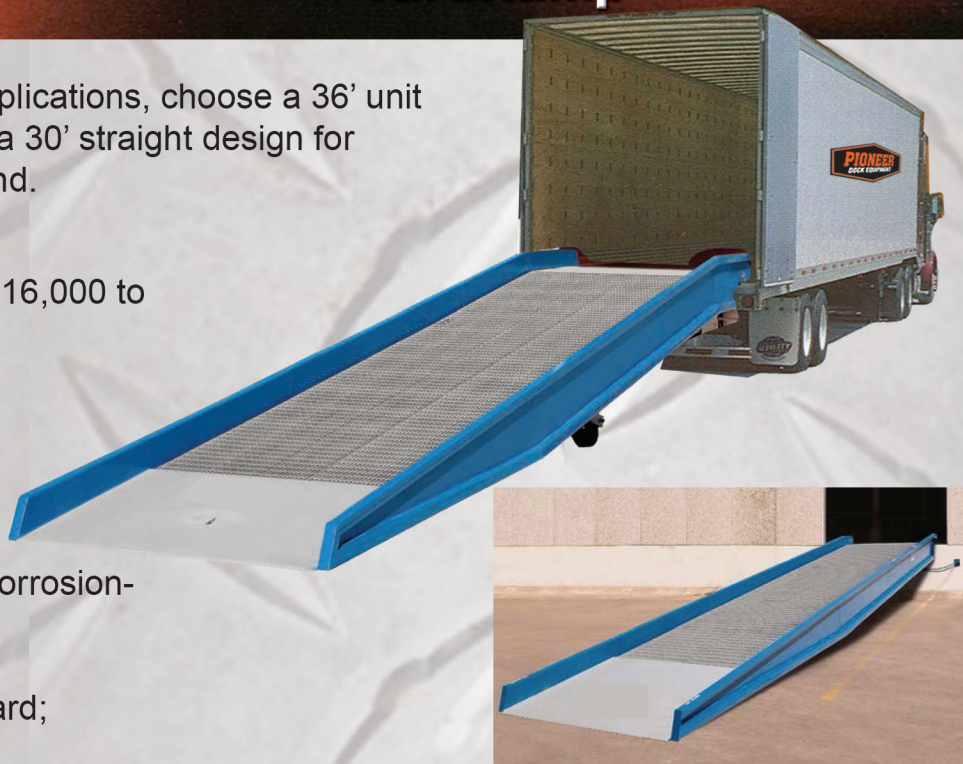

### Options



**Ramp Clamp**



**Tow Bar**

**Undercarriage Assembly**

**Quality Dock Levelers**

**Long Lasting**

**Easy to Install and Operate**

**Safe**



# YR Series

## Yard Ramp Selection Guidelines

### Capacity

The capacity selected must be greater than the combined weight of the heaviest forklift and the heaviest weight of anticipated loads it will carry.

### Usable Width

Yard Ramp is available in 70" and 84" widths, with the 84" model accommodating more applications. The width should be at least 15" wider than the widest equipment to be used on the ramp.

For railcar use, select a ramp width wide enough to prevent the forklift from hitting the ramp curbs as it turns into the railcar. Consult your forklift manual for radius turning capabilities. Measure railcar door openings to make sure the Yard Ramp will fit.

### Type and Length

**Level off - 36' Length:** A six-foot level off at the end of the ramp adds maneuverability for forklifts. This allows forklifts easier turning access into railcars and allows them to handle pallets next to the door openings. The 36' ramp is most popular where end-loading (trailers, etc.) is required.

**Straight - 30' Length:** This type is used primarily for ground to dock applications, where no level off is required.





**Rugged. Dependable. PIONEER.**

P.O. Box • Spring Hill, Tennessee 37174  
Phone: 931.486.2296 • Fax: 931.486.0316  
[www.pioneerleveler.com](http://www.pioneerleveler.com)

PIONEER offers a complete line of finely crafted, technologically advanced loading dock equipment, including **Hydraulic, Air Operated and Mechanical Pit Levelers, Edge-of-Dock and Hydraulic Top of Dock Levelers, Portable Dock boards, Vehicle Restraints, Dock Seals & Shelters, High Speed Fabric Roll-Up Doors,** and other quality accessories. Just **call us toll free** for personal, professional customer assistance and responses to all of your product needs.

**toll free**  
**1.800.251.3382**

RAMP TYPE	Ground to Dock 30' STRAIGHT	Ground to Truck 36' WITH 6' LEVEL-OFF
Wheel Diameter	18"	18"
Raised Lip Height	72"	67"
Lowered Lip Height	40"	33"
% of Grade at 50" High	14%	14%
Curb Heights	8"	8"
Carrier End Treadplate	30" Reinforced Apron with 15" Lip	

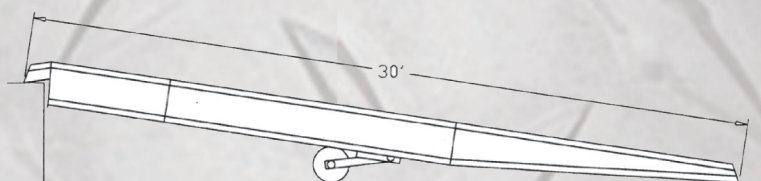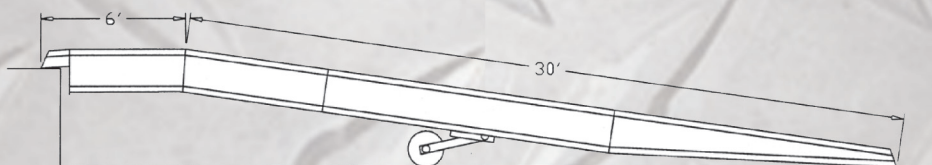

## Dealer Locations

PIONEER Dock Equipment is available nationwide. For the location of your nearest PIONEER Dealer call us **toll free at 1.800.251.3382.**

127516