



COLOSSUS

Industrial HVLS Fan

SUMMIT

Direct Drive HVLS Fan

APEX

Commercial HVLS Fan

BREVIS


3-Blade HVLS Fan

EPIC Fan encompasses an innovative design with enormous size, performance and savings. Poor air circulation can cause stagnant air, hot and cold spots, and unwanted condensation. Our HVLS fans work hard to ensure your facility reaches its full productivity potential. Looking sleek and attractive while paired with effective function and features, all fan CFM numbers are AMCA certified.

Epicfan.com



COLOSSUS

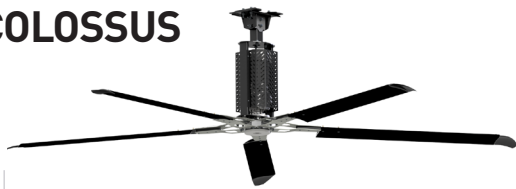

DIAMETER SIZES

8'(2.4M) 10'(3.0M) 12'(3.7M) 14'(4.3M)
16'(4.9M) 18'(5.5M) 20'(6.1M) 24'(7.3M)

STANDARD POWER: 208 - 240V 1Ø or 3Ø, 460-480V, 575V 3Ø

- Extruded aluminum black or clear anodized blades
- Optimized 5-blade profile for low speed rotary airfoil application and near ground effect
- Wired touch screen remote
- Fan safety system incorporates steel hub, aircraft-grade safety cable and guy wires
- Fire Shut Down integration
- Variable Frequency Drive with forward/reverse operation
- 55 dBA*
- 8-24 feet (2.4-7.3 M) in diameter
- AMCA Tested CFM Numbers



VFD PANEL

BLADE COLORS AND WINGLETS



SUMMIT



DIAMETER SIZES

8'(2.4M) 10'(3.0M) 12'(3.7M) 14'(4.3M)
16'(4.9M) 18'(5.5M) 20'(6.1M) 24'(7.3M)

STANDARD POWER: 208 - 240V 1Ø or 3Ø, 460-480V, 575V 3Ø
120V 1Ø (8 to 14 ft diameter only)

- Extruded aluminum black or clear anodized blades
- 8-24 feet (2.4-7.3 M) in diameter
- Wired touch screen remote
- Trouble shooting from ground level
- DC Brushless Direct Drive motor
- Fire Shut Down integration
- 45 dBA*
- Variable Frequency Drive with forward/reverse operation
- AMCA Tested CFM Numbers



VFD PANEL

BLADE COLORS AND WINGLETS



APEX



DIAMETER SIZES

6'(1.8M) 8'(2.4M) 10'(3.0M)
12'(3.7M) 14'(4.3M)

STANDARD POWER: 120V 1Ø, 208V - 240V 1Ø or 3Ø

- Wired Touch Screen Remote
- Reverse Capability
- 6-14 feet (1.8-4.3 M) in diameter
- Fire Shut Down integration
- Gearless Direct Drive Motor
- Less Than 35 dBA*
- AMCA Tested CFM Numbers



NEMA 4X VFD PANEL

STANDARD COLORS



BREVIS



DIAMETER SIZES

8'(2.4M) 10'(3.0M) 12'(3.7M) 14'(4.3M) 16'(4.9M)
18'(5.5M) 20'(6.1M) 24'(7.3M)

STANDARD POWER: 120V 1Ø, 208V - 240V 1Ø or 3Ø,
460-480V, 575V 3Ø

- Clear anodized blades
- Optimized 3-Blade design for maximum performance
- 55 dBA*
- 8-24 feet (2.4-7.3 M) in diameter
- Fire Shut Down integration
- Variable Frequency Drive with forward/reverse operation
- AMCA Tested CFM Numbers



VFD PANEL

STANDARD CONTROL

OPTIONS: iFan 4.3, Fan 7.0, iFan 10.0



Epic and Epic Fans as words and logos are registered trademarks belonging to ASSA ABLÖY Entrance System AB or other companies controlled by the same organization. All rights reserved.

©ASSA ABLÖY Entrance Systems AB
All rights reserved. Part of ASSA ABLÖY
Printed in USA. Form #ECB-HVLSLU-1123

1612 Hutton Dr. Suite 140
Dallas, TX 75006
866.696.2464
www.epicfan.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations.

4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents.

*Results of sound measurement in the field may vary due to variations in surface types, environment and conditions.